

TECHNICAL RIDER

The fury of Harlequin

Running time: 1h and 20 minutes without intermission

Stage dimensions: 5 m wide - 4 m deep

Load IN: 4h

Load OUT: 1h

- 3 lines lighting trusses/ if in open-air 4 floor lamps with wind-up stand
- Possibility to screw the backdrop to the floor
- Black drapes
- Possibility to darken the room completely
- N. 5 dressing rooms to be equipped with a working shower and toilet, mirrors, good lighting, and temperature control.
- Possibility to control stall lighting from the control booth
- Power supply 20 kw 32 or 63 A
- The performance requires access to the audience from the playing space.

Technical Director and Stage Manager:

Matteo Pozzobon +39 349 2654058 matteooz@libero.it

Tour and General Organization Manager:

Federico Corona +39 334 7466886 info@stivalaccioteatro.it

Accounts department:

Elisa Dal Zotto +39 0444 1321602 amministrazione@stivalaccioteatro.it

Vehicles:

- FIAT DUCATO plate BY 943 JH
- IVECO Daily plate EC 744 LW

The Presenter should provide eventual transit passes and a safe parking area.


Important information about the show

- During the show the actors play among the audience and interact with them.
- During the play an actor lights a candle.

LIGHTING PLAN

ARLECCHINO FURIOSO

pianta luci

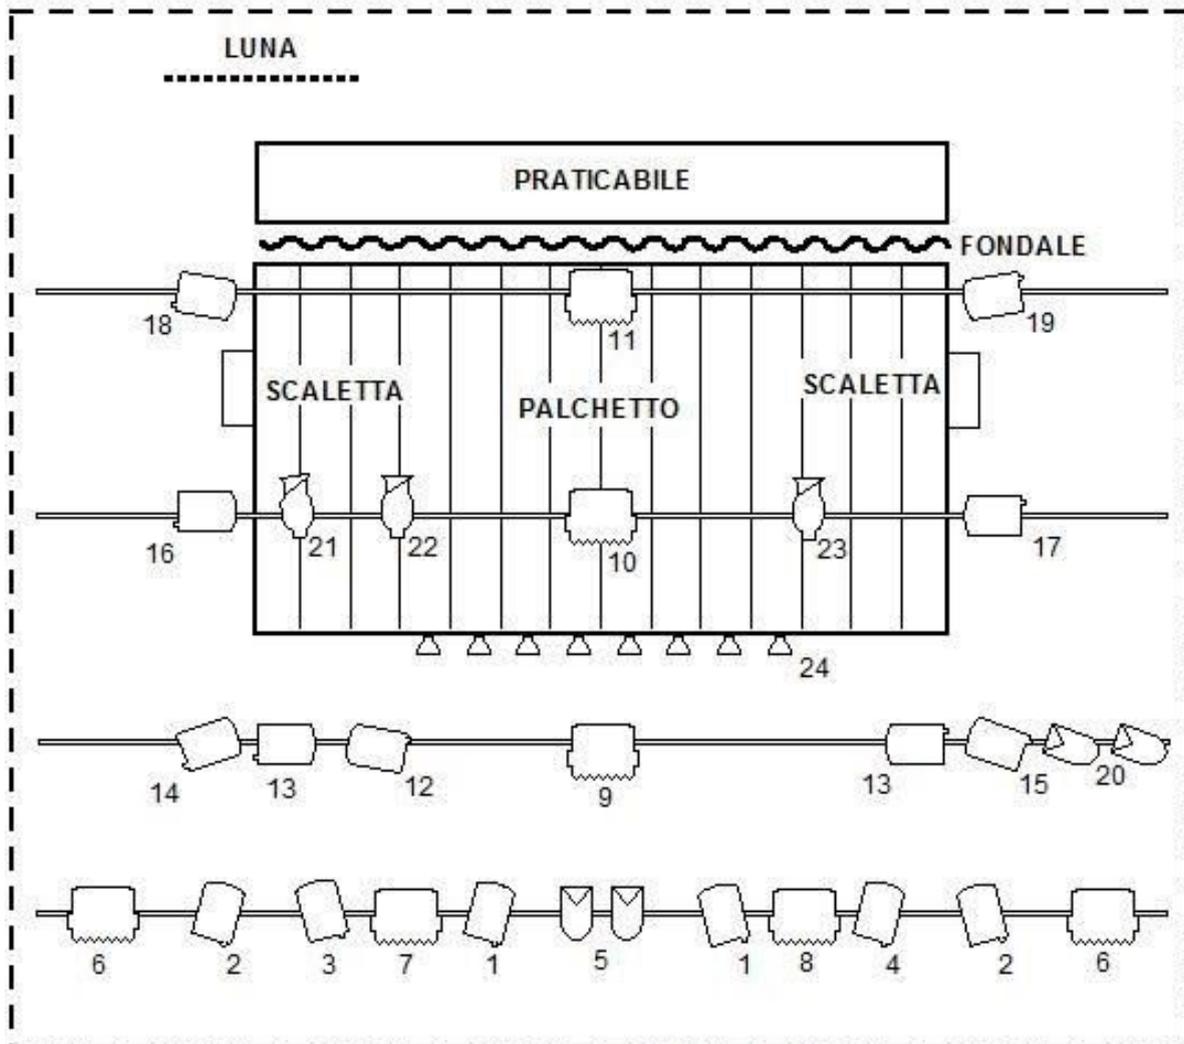

LEGENDA

-  n°15 PC 1000W
-  n° 4 PAR64 con lampada CP62
-  n°3 sagomatore con ottica 50°
-  n°5 DOMINO 1000W

STIVALACCIO TEATRO ASSOCIAZIONE CULTURALE

Strada Scuole dell'Anconetta, 79 - 36100 VICENZA

C.F. 90164790272 - P.IVA. 04213150271

info@stivalaccioteatro.it www.stivalaccioteatro.it